

The V25 Slimline Series

- Sleek, low profile frame design increases both your viewing area and light penetration.
- New Construction nailing fin for easy installation. Removal optional.
- 3/4" divided live grids fit between the layers of glass
- Full frame depth to fit any standard window jamb.
- 3/4" OA insulated glass utilizing Cardinal Low E 366 double strength glass provides superior thermal and sound insulation.
- Dura Seal® glass utilizes warm edge technology for increased energy savings.
- Multi-chambered, aluminum-reinforced center bar and lift rail for extra strength.
- Heavy duty, stainless steel, constant force balance system allows the sash to remain open in any position.


Not only does AWS have multiple window style options for homeowners, but we also have multiple window shapes to fit your needs. You can choose the color of windows and the grid patterns to fit your personal style preferences.

TOUGH COLORS AND FINISHES THAT ENHANCE YOUR HOME'S BEAUTY



STYLES TO FIT YOUR HOME

V25 Slimline, available in the following styles:

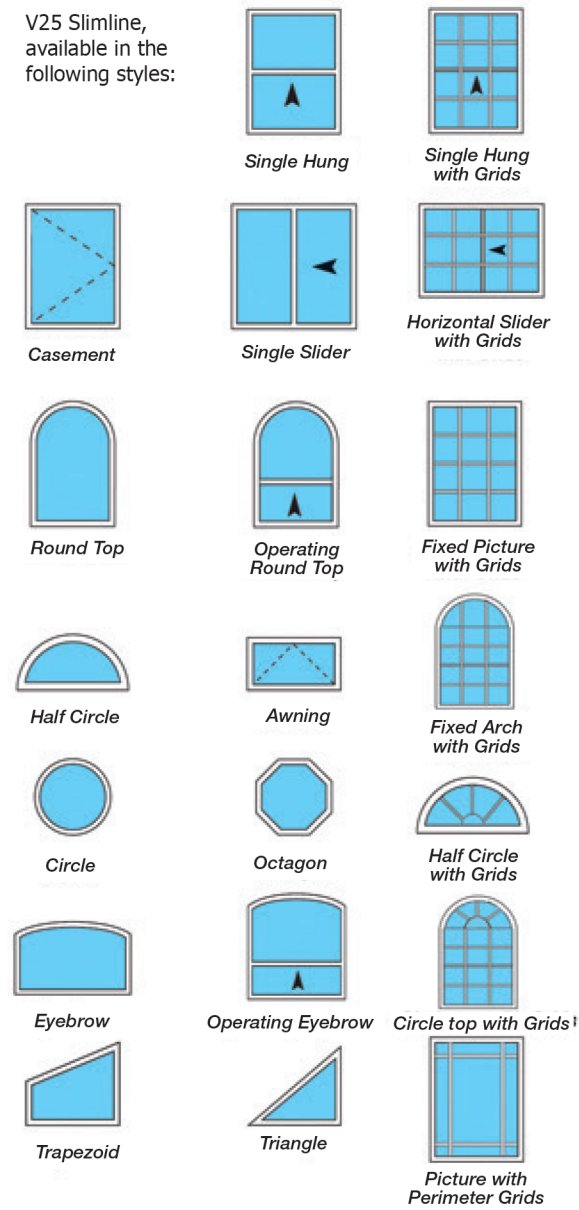

The V25 Slimline Series Vinyl Windows. Elegant, efficient, and affordable.



AmericanWindowSystems.com



6201-C Dowdell Road
Fort Worth, Texas 76119
817-654-9050



AmericanWindowSystems.com

The industry's slimmest profile delivers maximum visible glass area



Single Hung | Single Siding | Picture | Casement & Awning

V25 Slimline Single Hung

NFRC Values

GLASS	U-Value	SHGC Value
Low-E 366 Air	.33	.23
Low-E 366 Arg	.29	.23
Low-E 340 Arg	.29	.15

Structural Performance

Air Infiltration @25MPH	.08 cfm/ft 2
Water Penetration	4.5 psf
Uniform Loads	+/- 52.5 psf

AAMA RATING: **H-R30**



FEATURES & BENEFITS

- Dual Sweep Lock. Exceeds forced entry requirements.
- 3/4" OA insulated glass standard.
- Dual weather-stripping.
- Full 1 1/2" integral nailfin included. Removal optional.
- 3 1/4" Double wall frame for increased rigidity and thermal performance.
- Constant force balance standard.
- Integrated straight, bay, and bow mull available.
- Optional two piece field mulling system and heavy duty mulls available.
- Full family of Single Hung, Single Slider, 3-lite Slider, and Picture Windows.
- LowE³ double strength glass standard.

V25 Slimline Picture Window

NFRC Values

GLASS	U-Value	SHGC Value
Low-E 366 Air	.30	.25
Low-E 366 Arg	.26	.24
Low-E 340 Arg	.26	.16

Structural Performance

Air Infiltration @25MPH	.01 cfm/ft 2
Water Penetration	7.5 psf
Uniform Loads	+/- 75.0 psf

AAMA RATING: **FW-C30**



FEATURES & BENEFITS

- Compliments V25 single hung, slider, and casement systems.
- 3/4" OA insulated glass standard
- Full 1 1/2" integral nailfin included. Removal optional.
- Exterior glazed.
- 3 1/4" Double wall frame for increased rigidity and thermal performance.
- Integrated straight, bay, and bow mull available.
- Optional two piece field mulling system and heavy duty mulls available.
- LowE³ double strength glass standard.

V25 Slimline Single Slider

NFRC Values

GLASS	U-Value	SHGC Value
Low-E 366 Air	.33	.23
Low-E 366 Arg	.29	.23
Low-E 340 Arg	.29	.15

Structural Performance

Air Infiltration @25MPH	.08 cfm/ft 2
Water Penetration	4.5 psf
Uniform Loads	+/- 52.5 psf

AAMA RATING: **C-R30**



FEATURES & BENEFITS

- 3/4" OA insulated glass standard.
- Full 1 1/2" integral nailfin included. Removal optional.
- Dual weather-stripping.
- Full span reinforced interlocking sashes.
- 3 1/4" Double wall frame for increased rigidity and thermal performance.
- Integrated straight, bay, and bow mull available.
- Optional two piece field mulling system and heavy duty mulls available.
- Tandem brass rollers for ease of operation and durability.
- LowE³ double strength glass standard.