



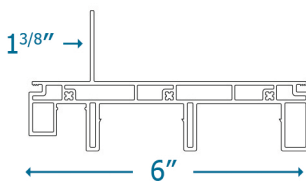

RETROFIT – REPLACEMENT

PD19MW PATIO DOOR

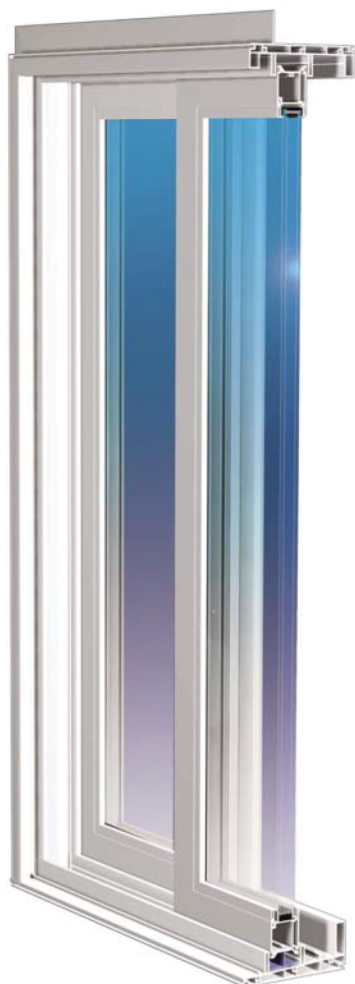

PD1901 FRAME HEAD AND JAMB



PD19 Retrofit - Replacement

The American Window Systems™ PD19 Patio Door combines all of the features that you want in a door. It provides ease of operation and excellent performance.

Its welded sash and frame gives a generous expanse of glass for a greater viewing area and increased structural integrity. For enhanced energy efficiency, it has heavy-duty weather stripping around a deep pocket interlock and on the full perimeter of the door. The doors come in your choice of white, almond and clay solid vinyl, with high quality, attractive handles.

FEATURES & BENEFITS

- **Multi-Point Locking Hardware**
- **Welded sash. Mechanical frame**
- **Colors: White, Almond and Clay**
- **Internal weep system**
- **Plated steel adjustable tandem rollers**
- **Keyed lock cylinder**
- **Field Reversible XO OX**
- **12 gauge steel reinforcing**
- **White/Almond/Clay hardware finish**
- **1" OA tempered LE366 standard glazing**
- **Dual seal weatherstripping.**
- **Exterior glazed**
- **Integral screen track**
- **Vinyl threshold cover**
- **AAMA approved PVC lineal certification**
- **NFRC simulations**
- **ENERGY STAR® Partner**



White



Almond



Clay

Standard interior and exterior colors are White, Almond or Clay offering a smooth clean lines to your home's design.

Contact us:

6201-C Dowdell Road
Fort Worth, TX 76119

817-654-9050

MFG. LIMITATIONS

Maximum	Width
	8'0" (XO)(OX)
	9'0" (XOX)(XOO)(OOX)
	12'0" (XOX)(XOO)(OOX)
	16'0" (XOOX)(OXXO) (OXOO)(OOXO)
Maximum	Height 6'8" & 8'0"
	(XO)(OX)
	(XOX)(XOO)(OOX)
	(XOX)(XOO)(OOX)
	(XOOX)(OXXO) (OXOO)(OOXO)

BASELINE PERFORMANCE

Thermal Insulation

GLASS	U-Value	SHGC
Low-E/Air	.31	.24
Low-E/Argon	.27	.24

Structural Performance

Air Infiltration @ 25MPH	.12 cfm/ft²
Water Penetration	6.0 psf
Uniform Loads	+/-40.0 psf

AAMA Rating: R-PG40 (8068)