




SOLID VINYL WINDOWS

SH46WW SINGLE HUNG

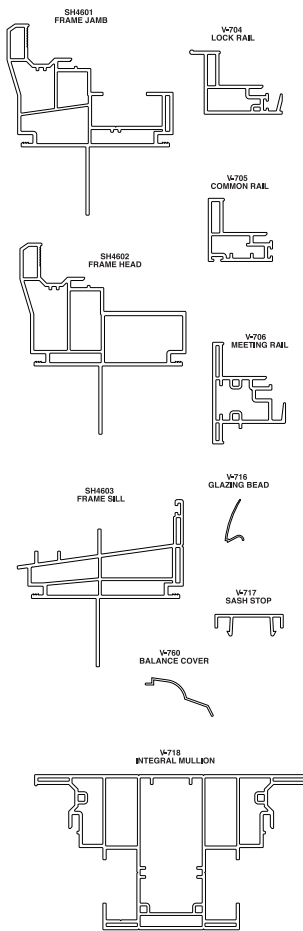

MADE IN TEXAS

MFG. LIMITATIONS

	Width
Minimum	12"
Maximum	48"

	Height
Minimum	24"
Maximum	96"

* Minimum width and heights are determined by process machinery capabilities.

BASELINE PERFORMANCE

NFRC Values

GLASS	U-Value	SHGC Value
Clear	.50	.68
Low-E 366-air	.33	.23
Low-E 366-ARG	.30	.22

Structural Performance

Air Infiltration @ 25MPH	.14 cfm/ft ²
Water Penetration	6.0 psf
Uniform Loads	+/- 60.0 psf

AAMA RATING: H-R40



FEATURES & BENEFITS

- H-R40 Performance
- Exterior bevel frame with sloped sill.
- Dual Sweep Lock. Exceeds forced entry requirements.
- 3/4" insulated glass standard.
- Dual weather-stripping.
- Full 1 1/2" integral nailfin.
- Full span interlocking and reinforced sashes.
- 2 7/8" Double wall frame for increased rigidity and thermal performance.
- Constant force balance standard.
- Integrated straight, bay, and bow mull available.
- Optional two piece field mulling system, hurricane tested.
- Full family of Single Hung, Single Slider, 3-lite Slider, and Picture Windows.
- LowE³ Glass Standard

ASSEMBLIES

