



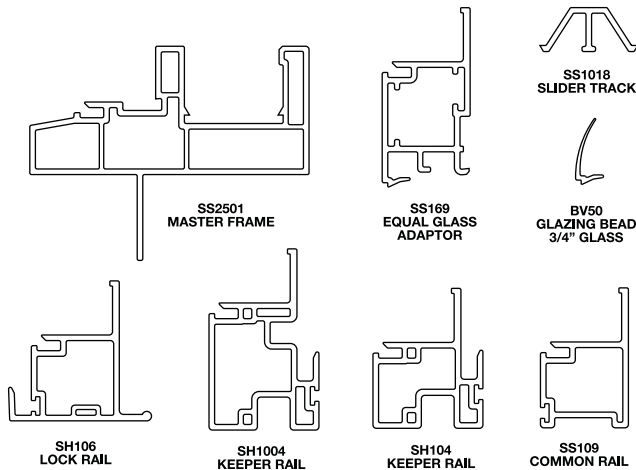

SOLID VINYL WINDOWS

# SS25 WW SINGLE SLIDER

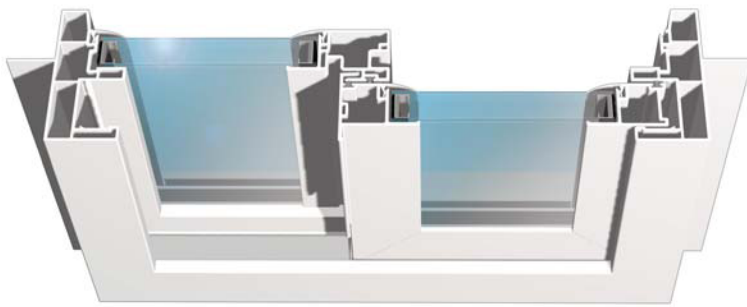

**MADE IN TEXAS**

## MFG. LIMITATIONS

	Width
Minimum	24"
Maximum	96" (XO) 120" (XOX)

	Height
Minimum	12"
Maximum	72"

\* Minimum width and heights are determined by process machinery capabilities.

## BASELINE PERFORMANCE

### NFRC Values

GLASS	U- Value	SHGC Value
Clear	.52	.68
Low-E 366- Air	.33	.23
Low-E 366- Arg	.30	.22

### Structural Performance

Air Infiltration @ 25MPH	.08 cfm/ft <sup>2</sup>
Water Penetration	5.25 psf
Uniform Loads	+/- 52.5 psf

AAMA RATING: HS-R35



## FEATURES & BENEFITS

- HS-R35 performance
- 3/4" glass standard.
- Full 1 1/2" integral nailfin.
- Dual weather-stripping.
- Full span reinforced interlocking sashes.
- 3 1/4" Double wall frame for increased rigidity and thermal performance
- Integrated straight, bay, and bow mull available.
- Optional two piece field mulling system, hurricane tested.
- Tandem brass rollers for ease of operation and durability.
- Full family of Single Hung, Single Slider and Picture Windows.
- LowE<sup>3</sup> Glass Standard

## ASSEMBLIES

