




SOLID VINYL WINDOW

SS46WW SINGLE SLIDER

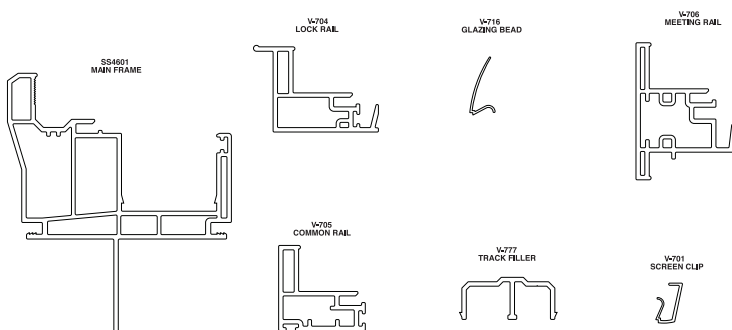

MADE IN TEXAS

MFG. LIMITATIONS

	Width
Minimum	24"
Maximum	96"

	Height
Minimum	12"
Maximum	60"

* Minimum width and heights are determined by process machinery capabilities.

BASELINE PERFORMANCE

NFRC Values

GLASS	U-Value	SHGC Value
Clear	.52	.68
Low-E 366-Air	.33	.23
Low-E 366-Arg	.30	.23

Structural Performance

Air Infiltration	@ 25MPH	.16 cfm/ft ²
Water Penetration		5.25 psf
Uniform Loads		+/- 60.0 psf

AAMA RATING: HS-R35



FEATURES & BENEFITS

- HS-R35 Performance
- Beveled face with sloped inner chamber for improved water drainage.
- Dual Sweep Lock. Exceeds forced entry requirements.
- Dual weather-stripping.
- 3/4" insulated glass standard.
- Full 1 1/2" integral nailfin.
- Full span reinforced interlocking sashes.
- 2 7/8" Double wall frame for increased rigidity and thermal performance.
- Integrated straight, bay, and bow mull available.
- Tandem brass roller for ease of operation and durability.
- Full family of Single Hung, Single Slider, 3-lite Slider, and Picture Windows.
- LowE³Glass Standard

ASSEMBLIES

